

PUSH-FIT COUPLER FOR HDPE

# comfit


Fast, Easy Air-Tight Installation  
 Transition to IPS size PVC, Steel and Fiberglass conduits.  
 Designed in accordance with the special demands of the leading cable duct companies and contractors.  
 Excellent for blowing and pulling cable installation methods.  
 Compact profile reduces difficulties traditionally incurred in the cable duct through the installing machinery and narrow trenches.  
 Push-fit method ensures easy and simple assembly and disassembly.

*Grabs & holds like a chinese finger with teeth!*



**Technical Characteristics:**  
 Pull out—PH 10 according to DIN8076T3  
 Air Pressure—12 bar 60°C2hr  
 Comfit is non-transparent and protected against UV radiation

Pipe OD Inches	Cat. No.	Weight	Qty/Box
1.315	Comfit 100	17 lbs.	70
1.660	Comfit 125	26 lbs.	56
1.900	Comfit 150	23 lbs.	36
2.375	Comfit 200	51 lbs.	34

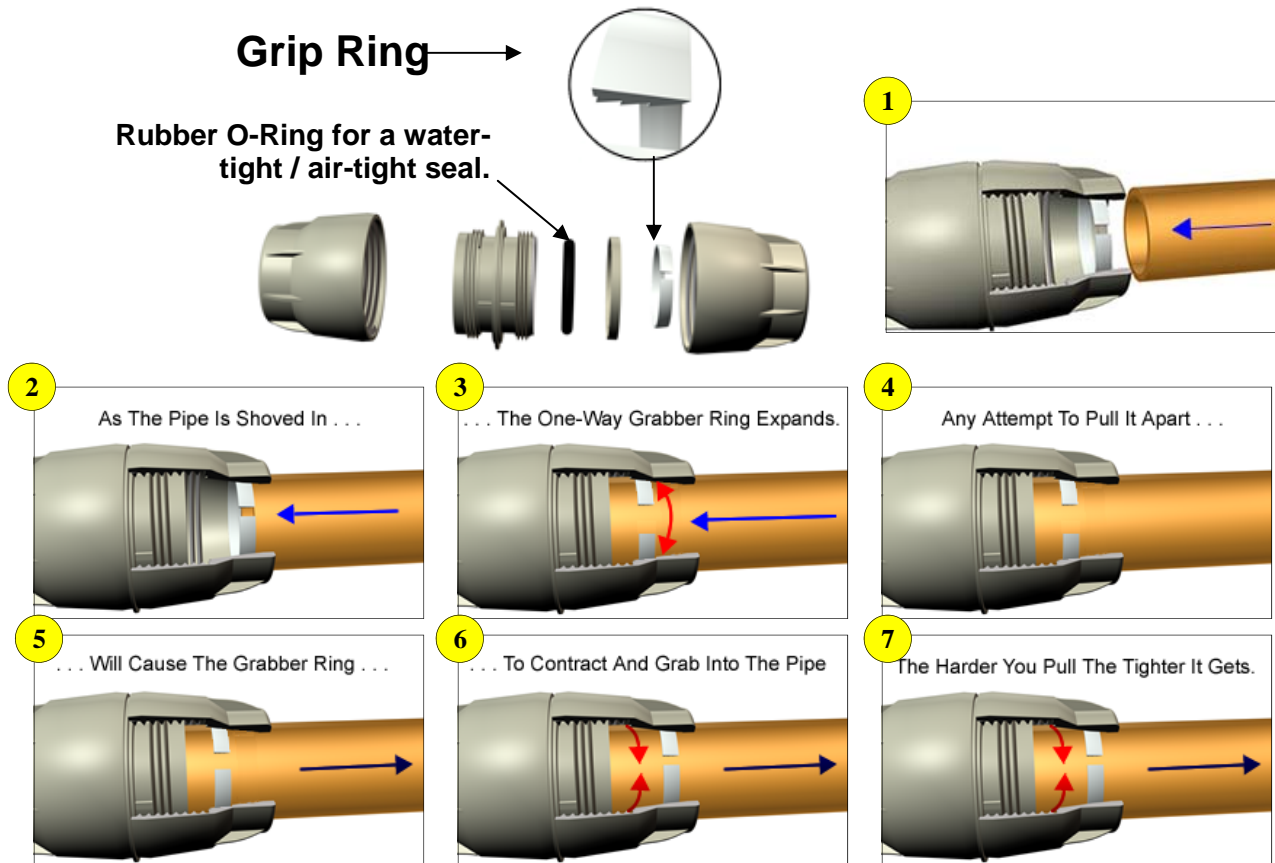

IRONHED, LLC—TOLL FREE 1-866-476-4510 / EMAIL [dhall@ironhedllc.com](mailto:dhall@ironhedllc.com)

[www.comfitusa.com](http://www.comfitusa.com)